

NOTES:
 1. WIRE PER WIRING INFORMATION TABLES. WIRING SHOULD BE BETWEEN DSUB CONNECTOR AND TANDEM SPRING CONTACTS PUSHED ONTO CORRESPONDING PINS ON P/N 563583.

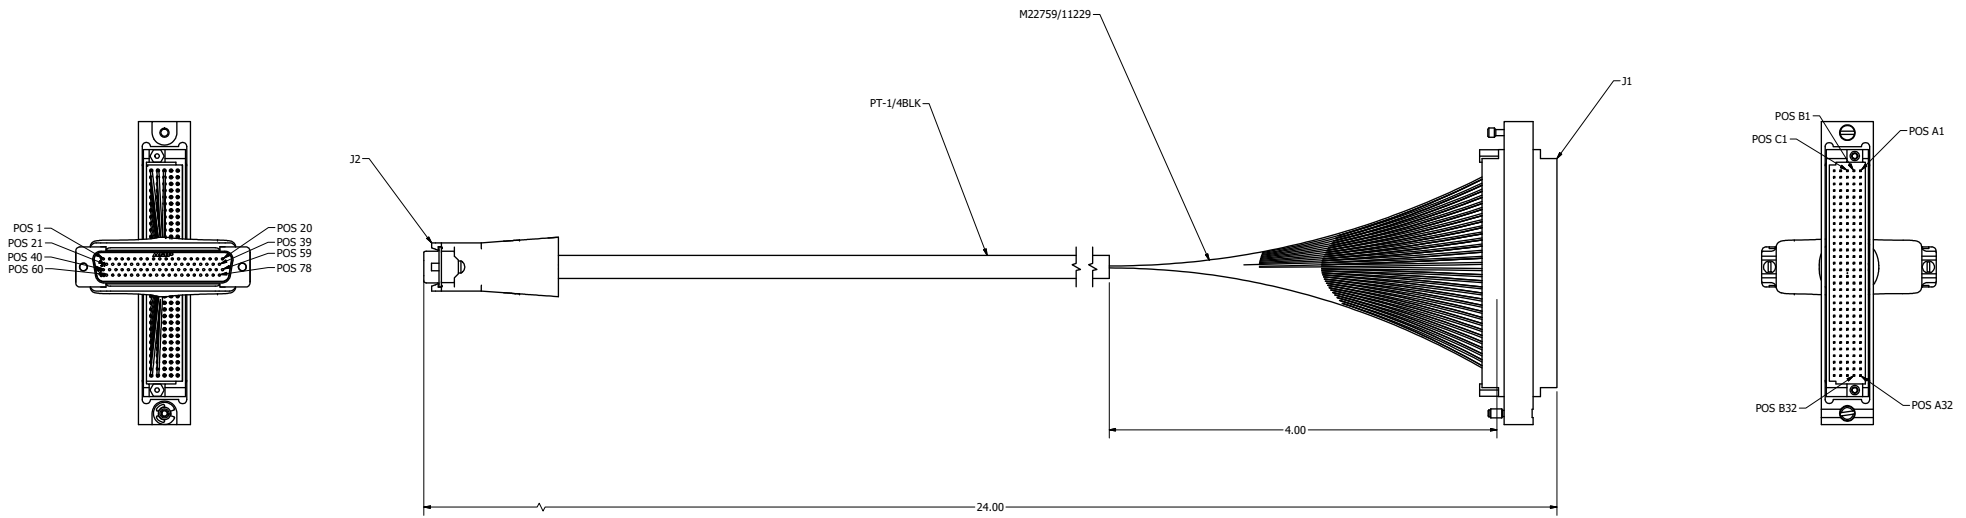


TABLE 1: WIRING INFORMATION		WIRING INFORMATION CONT.	
TO (J1)	FROM (J2)	TO (J1)	FROM (J2)
A1	1	B8	40
A2	2	B9	41
A3	3	B10	42
A4	4	B11	43
A5	5	B12	44
A6	6	B13	45
A7	7	B14	46
A8	8	B15	47
A9	9	B16	48
A10	10	B17	49
A11	11	B18	50
A12	12	B19	51
A13	13	B20	52
A14	14	B21	53
A15	15	B22	54
A16	16	B23	55
A17	17	B24	56
A18	18	B25	57
A19	19	B26	58
A20	20	B27	59
A21	21	B28	60
A22	22	B29	61
A23	23	B30	62
A24	24	B31	63
A25	25	B32	64
A26	26	C1	65
A27	27	C2	66
A28	28	C3	67
A29	29	C4	68
A30	30	C5	69
A31	31	C6	70
A32	32	C7	71
B1	33	C8	72
B2	34	C9	73
B3	35	C10	74
B4	36	C11	75
B5	37	C12	76
B6	38	C13	77
B7	39	C14	78

BALLOON LEGEND	
PART NUMBER	QTY

MAC PANEL PROPRIETARY This document may contain confidential and proprietary information that is the property of MAC Panel Company that may not be disclosed to, or duplicated for others except as authorized by MAC Panel Company.		DRAWN BY STE ENGINEERING	25/01/2017	MAC PANEL COMPANY - HIGH POINT, NC
TOLERANCES (UNLESS OTHERWISE SPECIFIED) SHEET METAL: UNFINISHED: ANGLES ± 1° ANGLES ± 1° .XX ± .03 .XX ± .01 .XXX ± .010 .XXX ± .005 .XXX ± .005		TITLE SCOUT Express Utility Cable, 24inch,		
REMOVE ALL BURRS AND BREAK SHARP EDGES.		OPERATIONS MANUFACTURING ASSEMBLY MATERIAL USED AS SHOWN		
Third Angle Projection		SIZE D	CAGE CODE 16654	DWG NO 561130-CU
		SCALE	SPN:	REV A
				SHEET 1 OF 1