


These assemblies are suitable for Agilent 34921A, 34923A, 34925A, 34931A, 34932A, & 34933A.
 ITA Mating modules are #562055 or #561421

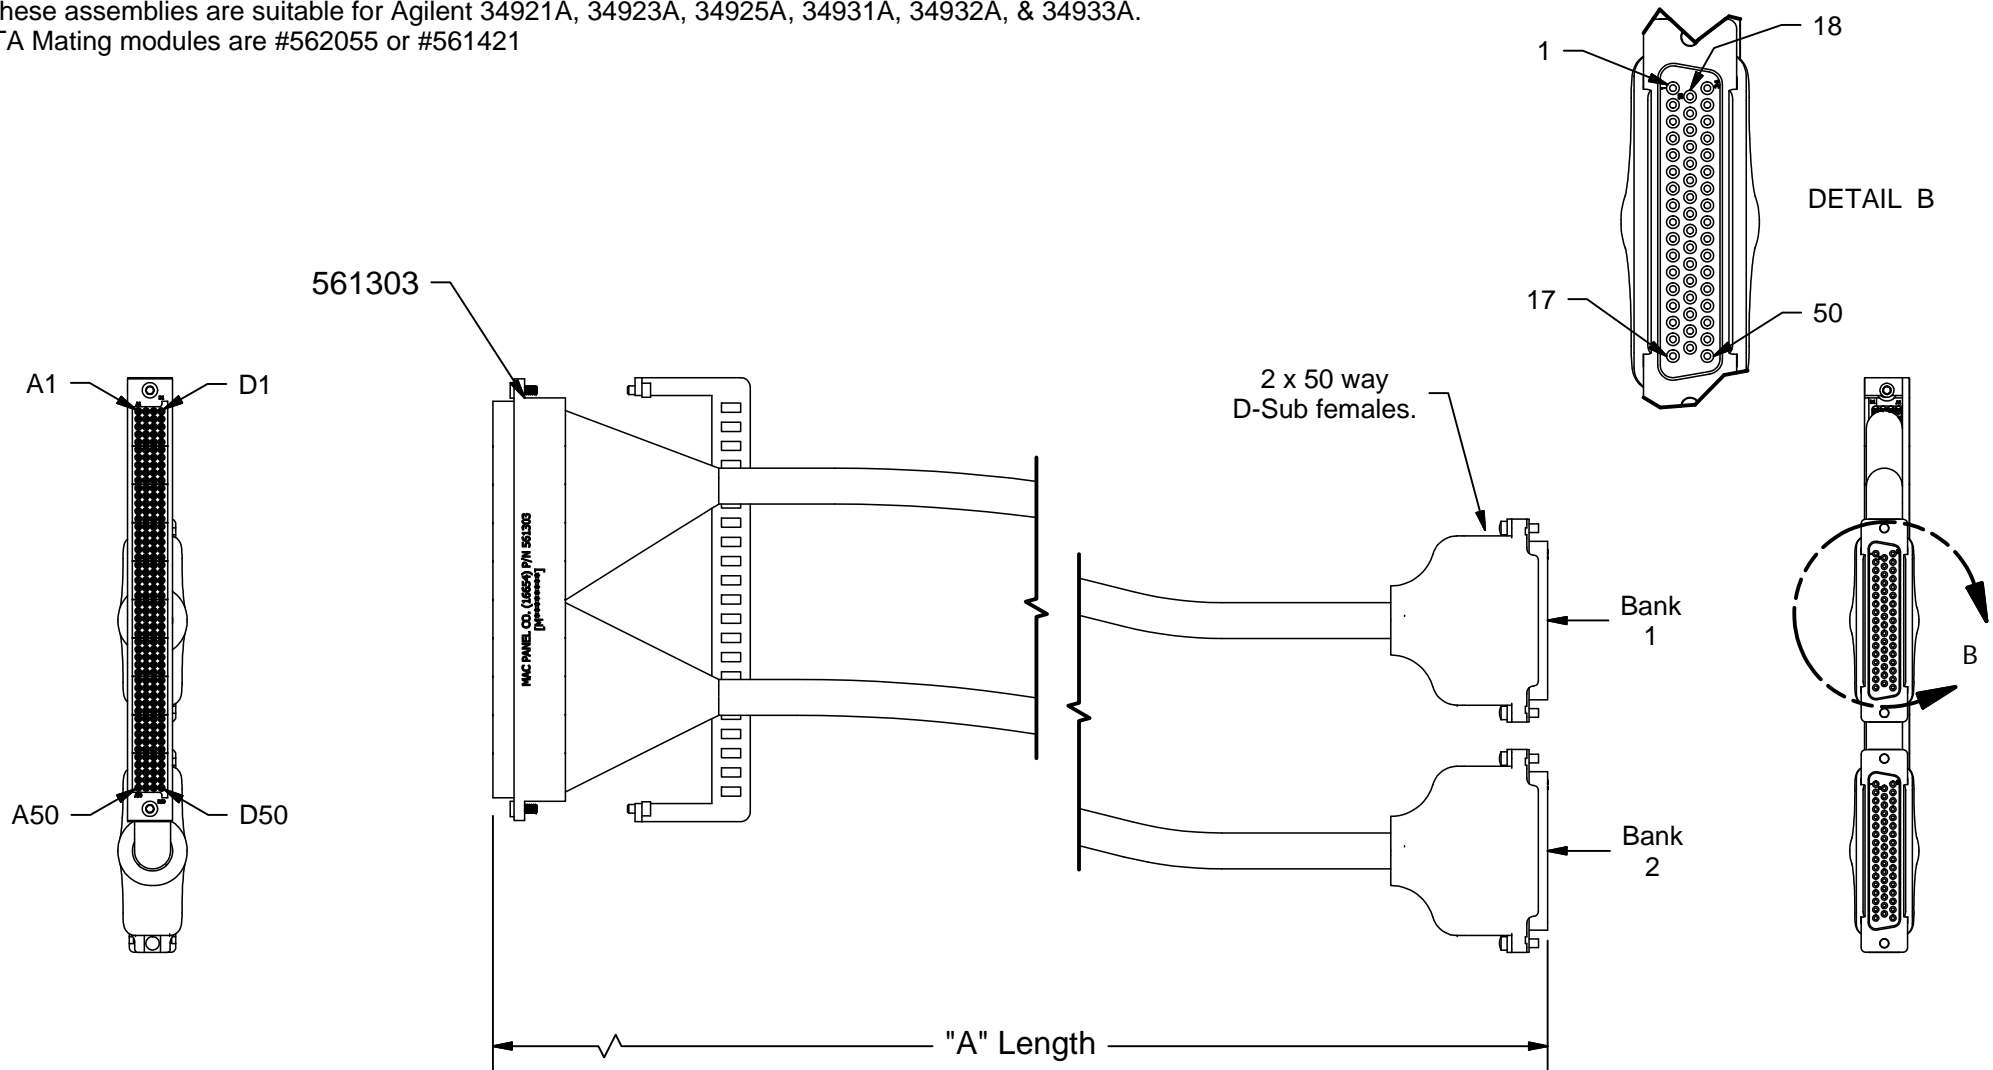

Part #	"A" Length
563125-18	18"
563125-36	36"

COMMENTS / NOTES		DRAWN BY 	DATE 30/03/2011	DESCRIPTION TITAN Cable Assembly, Agilent
	WWW.MACPANEL.COM	SHEET 1 OF 2	DRAWING NO. 563125-CU	
				REVISION

50 PIN D-SUB FEMALE TO 200 POSITION MODULE PIN-OUT

50 PIN D-SUB BANK 1	MAC MODULE		50 PIN D-SUB BANK 2	MAC MODULE	
1	A 1	T/P	1	A 25	T/P
2	A 2	T/P	2	A 26	T/P
3	A 3	T/P	3	A 27	T/P
4	A 4	T/P	4	A 28	T/P
5	A5	T/P	5	A29	T/P
6	A 6	T/P	6	A 30	T/P
7	A 7	T/P	7	A 31	T/P
8	A 8	T/P	8	A 32	T/P
9	A9	T/P	9	A33	T/P
10	A 10	T/P	10	A 33	T/P
11	A 11	T/P	11	A 35	T/P
12	A 12	T/P	12	A 36	T/P
13	B 1	T/P	13	B 25	T/P
14	B2	T/P	14	B26	T/P
15	B 2	T/P	15	B 26	T/P
16	B 4	T/P	16	B 28	T/P
19	B5	T/P	19	B29	T/P
20	B6	T/P	20	B30	T/P
21	B 7	T/P	21	B 31	T/P
22	B 8	T/P	22	B 32	T/P
23	B 9	T/P	23	B 33	T/P
24	B 10	T/P	24	B34	T/P
25	B11	T/P	25	B35	T/P
26	B12	T/P	26	B36	T/P

50 PIN D-SUB FEMALE TO 200 POSITION MODULE PIN-OUT

50 PIN D-SUB BANK 1	MAC MODULE		50 PIN D-SUB BANK 2	MAC MODULE	
27	C 1	T/P	27	C 25	T/P
28	C 2	T/P	28	C 26	T/P
29	C 3	T/P	29	C 27	T/P
30	C4	T/P	30	C28	T/P
31	C5	T/P	31	C29	T/P
32	C6	T/P	32	C30	T/P
35	C7	T/P	35	C31	T/P
36	C8	T/P	36	C32	T/P
37	V9	T/P	37	C33	T/P
38	C 10	T/P	38	C 34	T/P
39	C11	T/P	39	C35	T/P
40	C12	T/P	40	C36	T/P
41	D1	T/P	41	D25	T/P
42	D2	T/P	42	D26	T/P
43	D 3	T/P	43	D 27	T/P
44	D4	T/P	44	D28	T/P
45	D5	T/P	45	D29	T/P
46	D6	T/P	46	D30	T/P
47	D 7	T/P	47	D 31	T/P
48	D 8	T/P	48	D 32	T/P
49	D9	T/P	49	D33	T/P
50	D10	T/P	50	D34	T/P
18	D11	T/P	18	D35	T/P
34	D12	T/P	34	D36	T/P
	17 & 33 JUMPERED TOGETHER			17 & 33 JUMPERED TOGETHER	
	D13 GROUND			D37 GROUND	


COMMENTS / NOTES

Wire List



WWW.MACPANEL.COM

DRAWN BY DATE 30/03/2011



SHEET 2 OF 2

DESCRIPTION TITAN Cable Assembly, Agilent

DRAWING NO. REVISION

563125-CU